




SAT $\leq \frac{1}{2}$

fixing accessories for wirewound resistors

– equipped with AN collars
suitable for Series RW - RA - RSSD - RSO



SAT1

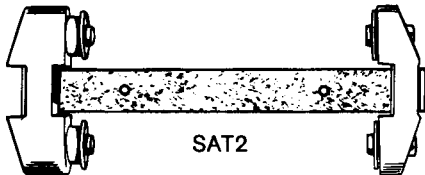

SAT2

These brackets can be fixed to metal panels when exceptional insulation is required (greater than 4000 V RMS in relation to ground).

The ceramic support blocks provide efficient thermal insulation. As one of the mount is spring-loaded, it is recommended to fit the resistor vertically, with the spring-loaded mount downwards.

These brackets can only be used with resistors equipped with AN connections.

SAT 1 (for 1 resistor)

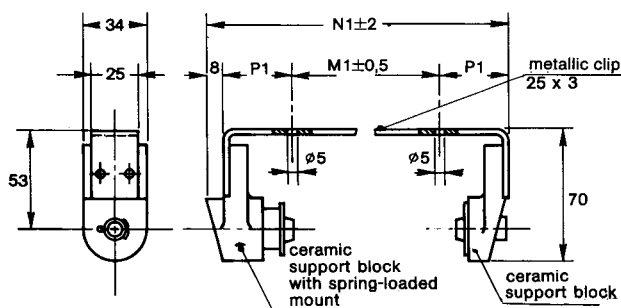


Table 1

RW-RA-RSSD-RSO resistor configuration	M1 ± 0,5	N1 ± 2	P1 ± 0,5
20 x 117	70	171	46,5
25 x 138	70	200	61,5
25 x 168	115	230	53,5
30 x 250	190	312	57
40 x 370	190	431	116,5
50 x 373	190	436	119

SAT 2 (for 2 resistors)

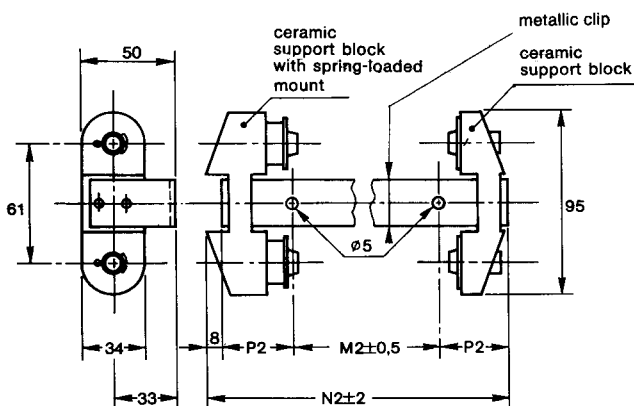


Table 2

RW-RA-RSSD-RSO resistor configuration	M2 ± 0,5	N2 ± 2	P2 ± 0,5
20 x 117	70	172	47
25 x 138	115	201	61,5
25 x 168	115	231	54
30 x 250	190	313	57,5

Dimensions in mm

ORDERING PROCEDURE

	MODEL	TYPE	STYLE	QUANTITY
Fixing accessories for RW 20 x 117 AN resistor	BRACKET	SAT 1	20.117	...